










DC133 Digital Visualizer


Quick Start Guide



1. Package Content


<p>Main Unit</p> 	<p>Quick Start Guide</p> 	<p>User Manual</p> 
<p>Power Cord</p> 	<p>VGA Cable</p> 	<p>C-Video Cable</p> 
<p>USB Cable</p> 	<p>Remote</p> 	<p>Soft Bag (Big, Small)</p> 

2. Product Overview

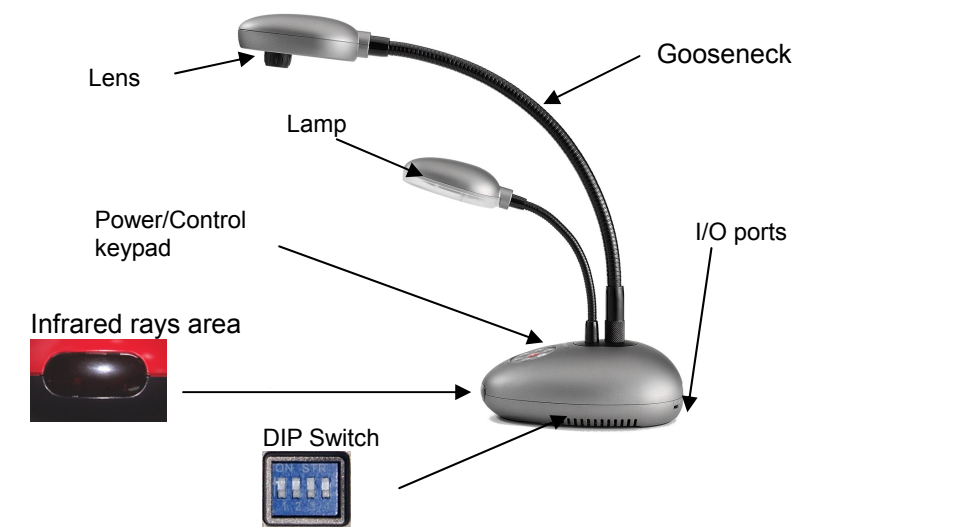


3. I/O Connection

3.1 Connecting VGA out to Monitor or Projector

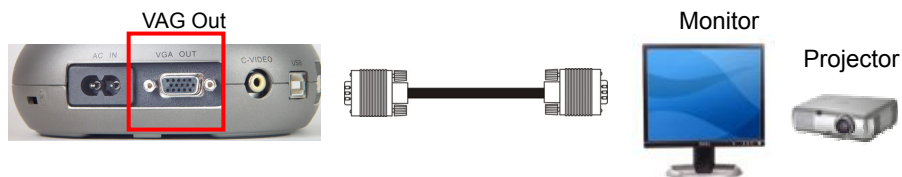


3.2 Connecting C-Video to TV

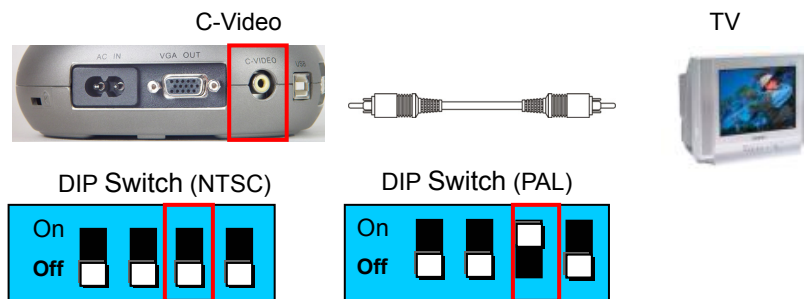

【Notice】 NTSC Setting : USA 、 Taiwan 、 Panama 、 Philippine 、 Canadian 、 Chile 、 Japan 、 Korea 、 Mexico

PAL Setting: Besides above listed countries


3.3 Connecting VGA in to Computer

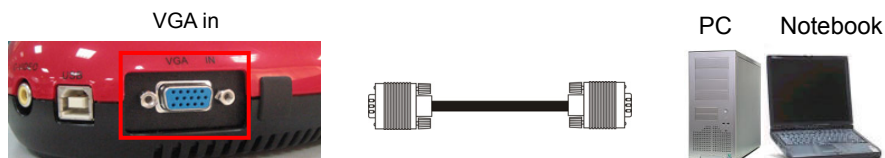

【Notice】 No VGA output once C-Video output is turn on


3.4 Connecting USB to Computer

Connect to USB port then install the supplied USB application program

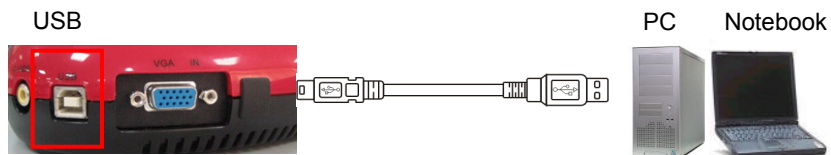


【Notice】 Don't connect the Digital Visualizer to PC Until USB Driver has been installed properly.

3.5 Plug in the power outlet

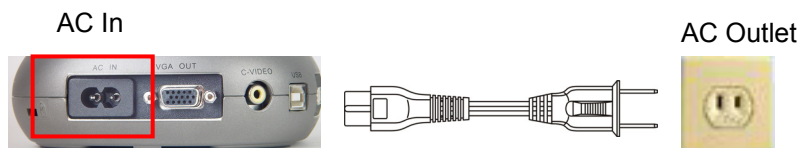


4. Start to use

4.1 Turn on the Digital Visualizer

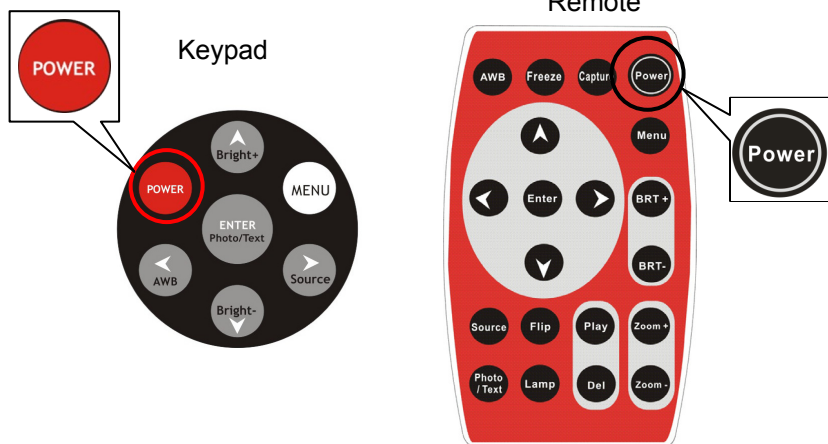


4.2 Select Input Source:


The default input source is set as "Digital Visualizer", press 『Source』 to switch

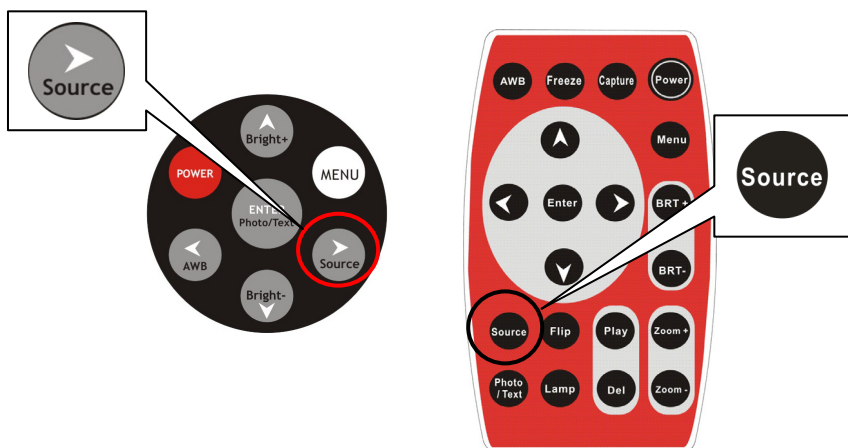

4.3 Zoom in / out:

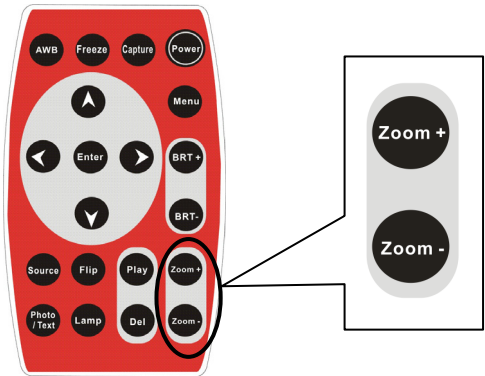


4.4 Brightness Adjustment:


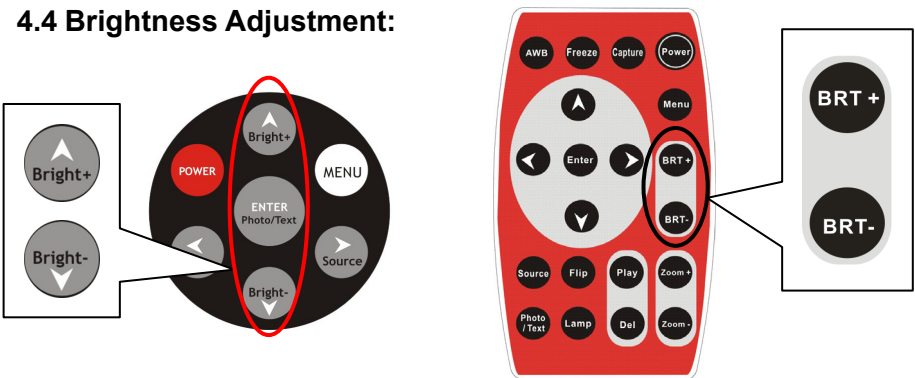


4.5 Capture & Play Image:

Capture Live Image or Play the captured image

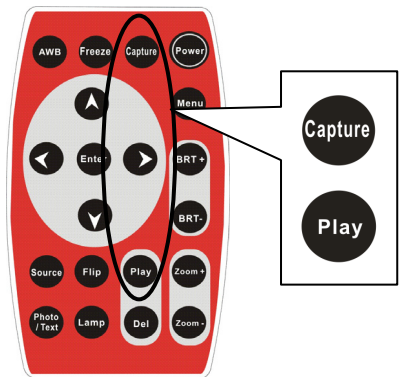

4.6 OSD Menu:

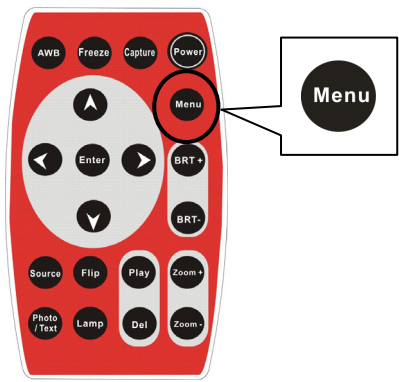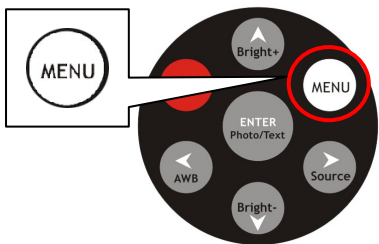

* More detail functions of full Control Menu (OSD Menu), please read the user manual.